



PARVEEN TUBING PACK-OFF ANCHOR ASSEMBLY

These anchors are designed to be set anywhere in the tubing string to straddle and pack-off holes or other communication in the tubing string, so that well production can be continued without pulling tubing. Tubing pack-off anchors are run and set by wireline methods.

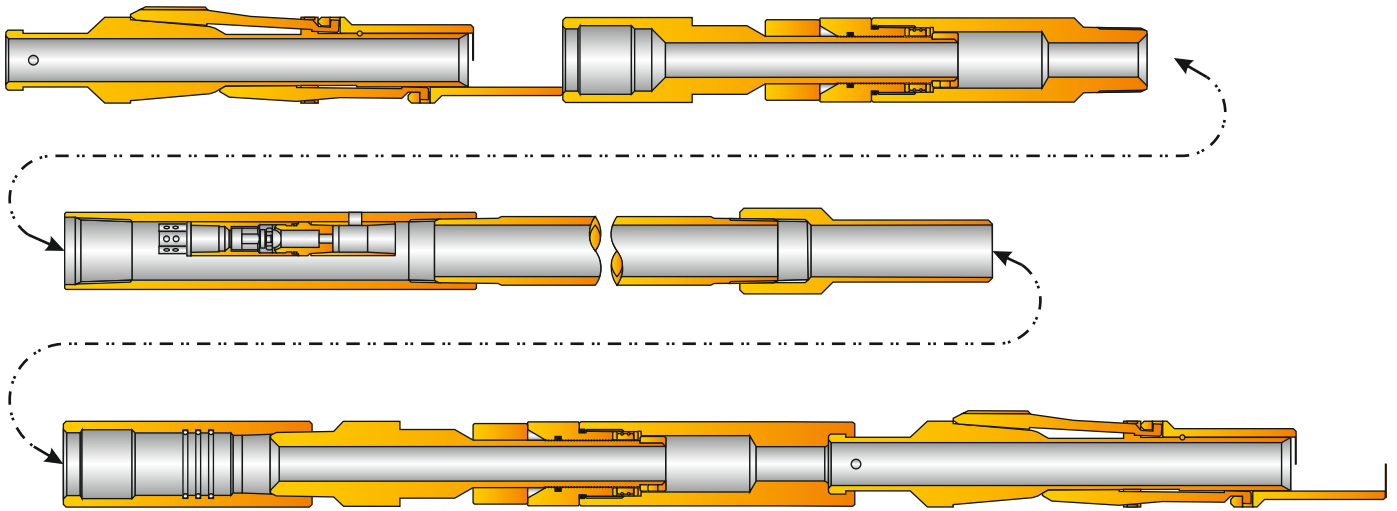

PARVEEN TUBING PACK-OFF ANCHOR ASSEMBLY - 5,000 psi

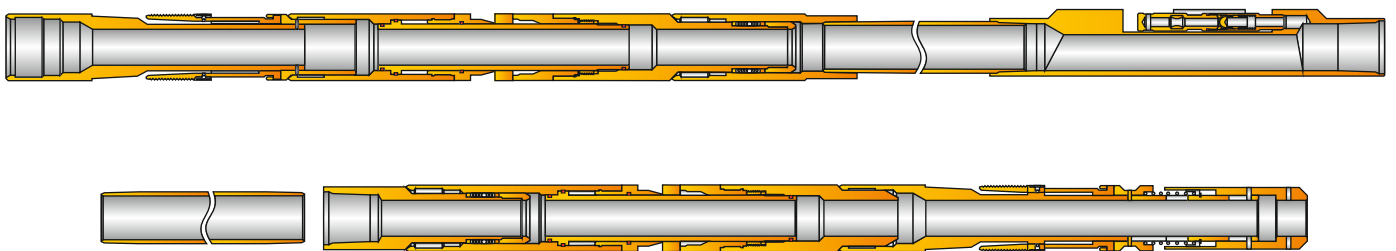

PARVEEN TUBING PACK-OFF ANCHOR ASSEMBLY - 10,000 psi