

ROPE SOCKETS


PARVEEN Rope Sockets are used to securely attach wireline / slickline to the tool string. They are available in four types.

1. Wedge Type: The Wedge Type or Pear Drop Type with a sleeve utilizes a brass wedge to keep the wireline attached within the Rope Socket. The Rope Socket assembly consists of a body with an external fishing neck, a sleeve and a brass wedge.

2. Spool Type: The Spool Type or Disc and Spring Type consists of a body with an external fishing neck, a spring, a spring support and a disc. The line is fastened to the grooved disc around its circumference.

3. Slip Type: The Slip Type is designed for use with small braided lines up to 5/16". It consists of a body with an external fishing neck, a carriage, slips, a set screw and a bottom sub. The slips are designed to break the line at a specific percentage of the line tensile strength.

4. Clamp Type: The Clamp Type consists of a body with an external fishing neck, a clamp, a set screw and a bottom sub. The line is placed in-between the clamps and secured using set screws.

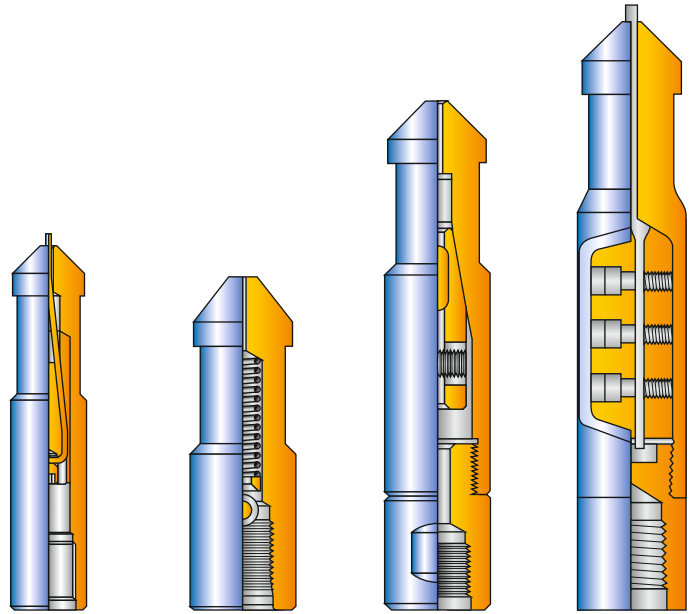

WEDGE TYPE SPOOL TYPE SLIP TYPE CLAMP TYPE

ROPE SOCKETS						
Size (in)	Max. O.D. (in)	F/N. O.D. (in)	Bottom Connection	Wire Size (in)	Type	Part No.
1	1.000	0.875	5/8-11 UNC	0.066-0.092	SPOOL	911000-SP
1-1/4	1.250	1.187	15/16-10 UN	0.066-0.092	SPOOL	911211-SP
1-1/2	1.500	1.375	15/16-10 UN	0.066-0.092	SPOOL	911521-SP
2-1/2	2.500	2.312	1-9/16-10 UN	0.092	SPOOL	912546-SP
1-7/8	1.750	1.875	1-1/16-10 UN	0.066-0.092	SPOOL	911932-SP
2-1/8	2.125	1.750	1-1/16-10 UN	0.092	SPOOL	912132 SP
1-1/8	1.125	0.875	5/8-11 UNC	0.066-0.092	WEDGE	911100-W
1-1/2	1.500	1.375	15/16-10 UN	0.092/0.108	WEDGE	911521-W
1-1/2	1.50	1.375	1-1/16-10 UN	0.092/0.125	WEDGE	911522-W
1-7/8	1.875	1.750	15/16-10 UN	0.092/0.125	WEDGE	911931-W
1-7/8	1.875	1.750	1-1/16-10 UN	0.092/0.125	WEDGE	911932-W
2-1/8	2.125	1.750	1-1/16-10 UN	0.092/0.125	WEDGE	912132-W
2-1/2	2.500	2.312	1-9/16-10 UN	0.092/0.125	WEDGE	912546-W
1-1/4	1.250	1.187	15/16-10 UN	0.125	CLAMP	911211-C
1-1/2	1.500	1.375	15/16-10 UN	0.125/0.187	CLAMP	911521-C
1-7/8	1.875	1.750	1-1/16-10 UN	0.187	CLAMP	911932-C
2-1/2	2.500	2.312	1-9/16-10 UN	0.250	CLAMP	912546-C
1-1/2	1.500	1.375	15/16-10 UN	0.187	SLIP	911521-SL
1-7/8	1.875	1.750	1-1/16-10 UN	0.187	SLIP	911936-SL
2-1/8	2.125	1.750	1-1/16-10 UN	0.312	SLIP	912132-SL
2-1/2	2.500	2.312	1-9/16-10 UN	0.312	SLIP	912546-SL

• Other sizes available on request