




WIRE FINDER GRAB

The PARVEEN Wire Finder Grab is used in the same way as the standard wireline grab to retrieve broken wireline from the well bore.

The grab incorporates a skirt which lessens the chance of passing the top of the broken wireline.




**WIRE
FINDER
GRAB**

WIRE FINDER GRAB			
Max. O.D. (in)	F/N.O.D. (in)	Top Connection	Part No.
1.50	1.187	15/16 - 10 UN	167-150
2.00	1.375	15/16 - 10 UN	167-200
2.50	1.375	15/16 - 10 UN	167-250
3.00	1.750	1-1/16 - 10 UN	167-300
4.00	1.750	1-1/16 - 10 UN	167-400

SOLID WIREFINDER

PARVEEN Solid Wirefinder is used to bend or ball the uppermost part of the broken wireline. The wire can then be engaged by a wireline grab and retrieved.

SOLID WIREFINDER			
Size (in)	2	2-1/2	3
Fishneck O.D. (in)	1.375	1.375	1.375
Max. O.D. (in)	1.813	2.300	2.740
Top Connection	15/16 - 10	15/16 - 10	15/16 - 10
Make Up Length	10.938	11.313	10.938
Part Number	54260-S	54250-S	54300-S

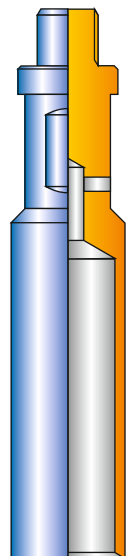

**SOLID
WIREFINDER**