



'GS' PULLING TOOL

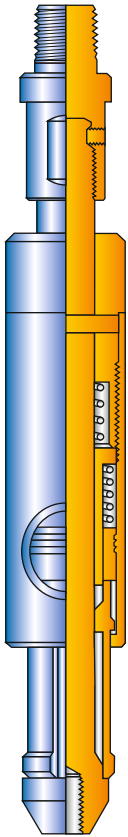

GS PULLING TOOL

The PARVEEN 'GS' Pulling Tool is designed to unlock and pull various downhole equipment with internal fishing necks. These tools can be released from the device by jarring down. By installing a 'GU' Shear Up Adapter, the 'GS' Pulling Tool can be converted to a jar up to release tool ('GR' Pulling Tool).

'GS' PULLING TOOL							
Nominal Size (in)	Prong Conn. Box	Fishing Neck I.D. Guide (in)	Max. O.D. (in)	F/N O.D. (in)	Top Conn.	Reach (in)	Part No.
1-1/4	3/8 - 16	0.880	1.160	1.000	5/8 - 11 UNC	1.08	28125-00
1-1/2 - 1-3/4	1/2 - 13	1.060	1.470	1.187	15/16 - 10 UN	1.62	28150-00
2	1/2 - 13	1.380	1.750	1.375	15/16 - 10 UN	1.62	28200-00
2	1/2 - 13	1.380	1.810	1.375	15/16 - 10 UN	1.62	28200-01
2-1/2	5/8 - 11	1.810	2.160	1.750	15/16 - 10 UN	1.62	28250-00
2-1/2	5/8 - 11	1.810	2.160	1.750	15/16 - 10 UN	1.62	28250-01
3	5/8 - 11	2.310	2.720	2.313	1-1/16 - 10 UN	1.62	28300-00
3-1/2	1-3/8 - 12	2.620	3.110	2.313	1-1/16 - 10 UN	1.62	28350-00
4	2-1/8 - 12	3.120	3.620	2.313	1-1/16 - 10 UN	1.62	28400-00
5	2-1/2 - 10	4.000	4.500	3.125	1-1/16 - 10 UN	1.82	28500-00
6	2-3/4 - 10	4.750	5.560	3.125	1-1/16 - 10 UN	1.86	28600-00
7	3-5/8 - 10	5.250	5.830	3.125	1-1/16 - 10 UN	1.86	28700-00
7	3-5/8 - 10	5.250	5.880	3.125	1-1/16 - 10 UN	1.86	28700-01

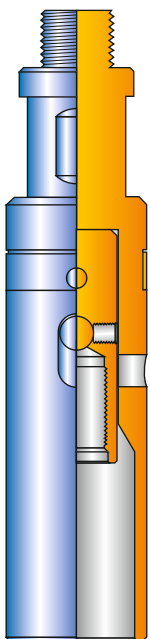

GU SHEAR UP ADAPTER

'GU' SHEAR UP ADAPTER

The PARVEEN 'GU' Shear Up Adapter is used to convert a 'GS' (jar down to release) pulling tool to a 'GR' (jar up to release) pulling tool.

'GU' SHEAR UP ADAPTER				
Nominal Size (in)	Max. O.D. (in)	F/N. O.D. (in)	Connection Pin X Box	Part No.
1-1/2	1.470	1.187	15/16-10 UN	170-150
2	1.812	1.375	15/16-10 UN	170-200
2-1/2	2.250	1.750	15/16-10 UN	170-250
3, 3-1/2, 4	2.718	2.312	1-1/16-10 UN	170-400
5	4.000	3.125	1-1/16-10 UN	170-500
6	5.560	3.125	1-1/16-10 UN	170-600
7	5.880	3.125	1-1/16-10 UN	170-700