




3-1/4" OD MULTI-STAGE SETTING TOOL



**Bleeder Wrench
WST-2125-146**

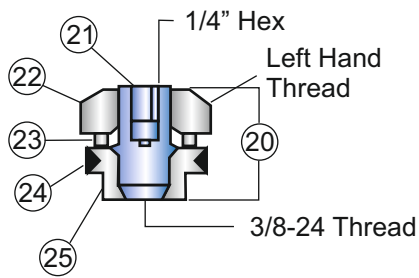

**Bleeder Valve Assy.
WST-2125-142**

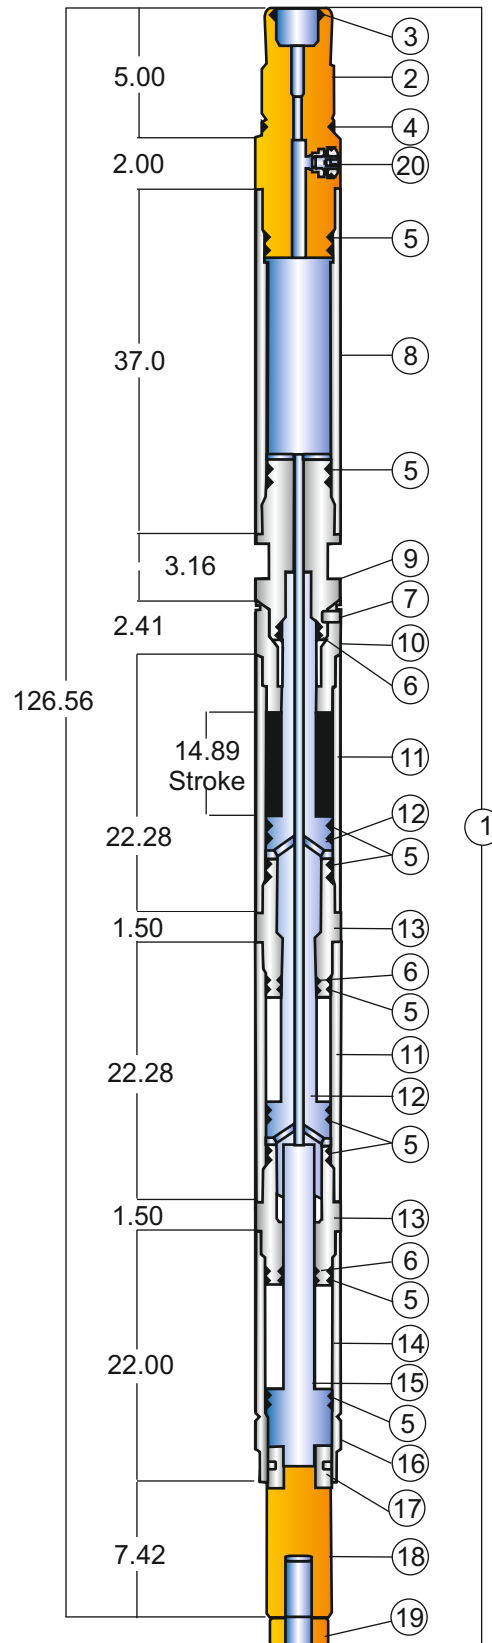



3-1/4" OD MULTI-STAGE SETTING TOOL

PART LIST

Item	Part Number	Req	Description
1	WST-3250-001		Assy. -3-1/4" O.D. "Multi-Stage Setting Tool, Top Connection To Fit "GO"3-1/4" O.D Quick-High Pressure Firing Head- Incl. Items 214
2	WST-3250-020	1	Top Sub- Ported For Bleeder Valve
3*	000-N569-328	1	O- Ring- 90 Duro
4*	000-N569-332	1	O- Ring- 90 Duro
5*	000-N569-331	18	O- Ring- 90 Duro
6*	000-N569-325	6	O- Ring- 90 Duro
7*	052-5304-003	1	Brass Shear Screw - Approx. 2300 Lbs Shear
8	WST-3250-021	1	Power Chamber
9	WST-3250-022	1	Shear Sub
10	WST-3250-023	1	Orifice Sub
11	WST-3250-024	2	Top Cylinder
12	WST-3250-025	2	Top Piston
13	WST-3250-026	2	Connector Sub
14	WST-3250-027	1	Bottom Cylinder
15	WST-3250-028	1	Bottom Piston
16	WST-3250-029	1	Lock Ring
17	WST-3250-030	1	Safety Release Nut- 52,000 Lbs. Weak Point
18	WST-3250-031	1	Bottom Adapter
19	WST-3250-031	1	Lock Nut
20	WST-5125-042	1	Assy. -bleeder Valve - Items 21-25
21	WST-5125-043	1	Stem
22	WST-5125-044	1	Retainer Nut
23	WST-5125-145	1	Seat
24*	000-N569-213	1	O- Ring - 90 Duro
25*	000.N569-012	1	O- Ring - 90 Duro
26	WST-5125-146		Bleeder Wrench
*	WST-3250-010		O- Ring Kit - 325° - Fir Wst-3250-001 Incl. Items 3,4,5,6,7,24,25-

Tool total stroke: 14.8 in.
 Tool piston area: 7.66 in.²
 Tool max. Pull: 72,000 lbs. At 9.0 inch stroke
 Ported tool max. Hydrostatic pressure: 10,000 psi