


## DOUBLE SLIP CONNECTOR

### Features

- Connects two sections of coiled tubing.
- High-strength construction makes the connector stronger than the CT string.
- A rotational lock prevents the connector from spinning on the coiled tubing when using small downhole motors or other low-to mid-torque generating assemblies.
- Re-useable connectors offer multiple use.
- The external make-up principle avoids inside diameter (I.D.) restriction of the coiled tubing, allowing unrestricted flow and the use of wiper plugs or process balls.
- Field interchangeable slips.
- Dual O-rings ensure pressure integrity.

DOUBLE SLIP CONNECTOR		
Coiled Tubing Size (in)	O.D. (in)	I.D. (in)
1	1.600	0.875
1 -1/4	1.850	1.125
1 -1/2	2.188	1.250
1 -3/4	2.375	1.531
2	2.688	1.531

Other sizes are available on request.

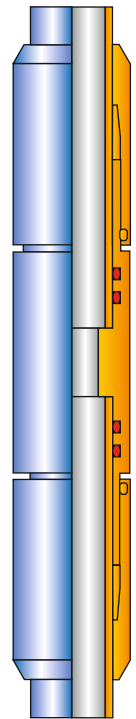

**Double Slip Connector**


## SINGLE SLIP CONNECTOR

### Features

- PARVEEN Slip type Coiled Tubing Connector are used to attach coiled tubing to the C.T. tool / workstring.
- With option of internal / external neck.
- High tensile strength.
- Field replaceable slip.
- Dual O-rings ensure pressure integrity.

SINGLE SLIP CONNECTOR		
Coiled Tubing Size (in)	O.D. (in)	I.D. (in)
1	1.600	0.875
1 -1/4	1.850	1.125
1 -1/2	2.188	1.250
1 -3/4	2.375	1.531
2	2.688	1.531
2 -3/8	3.375	2.000

Other sizes are available on request.

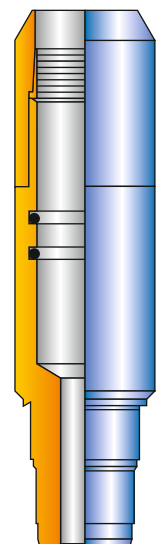

**Single Slip Connector**