




MODEL BKR LITE CEMENT RETAINER - WIRELINE SET / DRILLABLE

Specification Guide

Casing		Model BKR Lite Cement Retainer		Setting Range		Model BKR Wireline Setting Sleeve			Rating	
OD	WT	Part Number	OD	Min	Max	Sleeve Part Number	Tension Mandrel	Baker No.	PSI	Temp
4-1/2	9.5-16.6	050-3593-004	3.593	3.826	4.090	050-3593-200	050-3593-205	10	7,500	250 Deg F
5	11.5-18	050-3937-004	3.937	4.154	4.560	050-3937-200	050-3937-205	20		
5-1/2	13-25	050-4312-004	4.312	4.580	5.044	050-4312-200		20		
6	10.5-12	050-5375-004	5.375	5.595	6.135	050-5687-200		20		
6-5/8	17-34									
7	32-38									
7	17-35	050-5687-004	5.687	6.004	6.538					

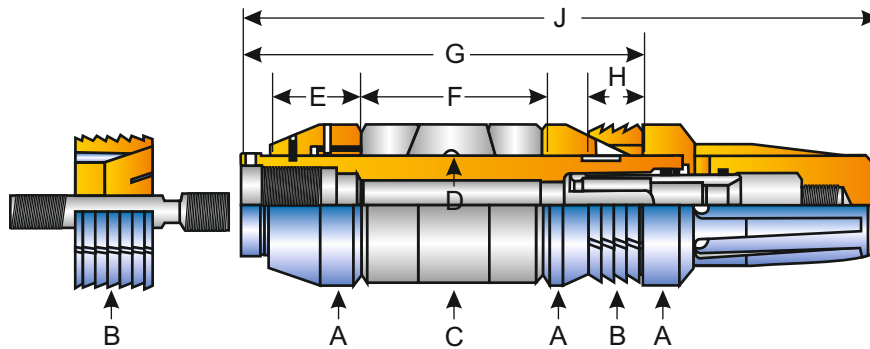

Dimensional Data

A Max OD	B	C	D	E	F	G	H	J	Seal Bore
3.593	3.531	3.531	2.500	2.437	5.375	12.437	2.187	20.312	1.345
3.937	3.875	3.875	2.500	2.437	5.375	12.437	2.187	20.312	
4.312	4.187	4.218	2.750	2.875	5.625	12.437	1.625	20.312	
5.375	5.312	5.281	3.687	2.687	6.687	14.032	2.187	22.000	2.000
5.687	5.625	5.593	3.687	2.687	6.687	14.032	2.187	22.000	