


MODEL BKR PREMIUM CEMENT RETAINER - WIRELINE SET / DRILLABLE

Specification Guide

Casing		Model BKR Premium Cement Retainer		Setting Range		Model BKR Wireline Setting Sleeve				Rating			
OD	WT	Part Number	OD	Min	Max	Sleeve Part Number	Tension Mandrel	Stub Bushing	Baker No.	PSI	Temp		
4-1/2	9.5-16.6	050-3593-000	3.593	3.826	4.090	050-3593-200	050-3593-205	Not Required	10	10,000	325 Deg F		
5	11.5-18	050-3937-000	3.937	4.154	4.560	050-3937-200	050-3937-205		20				
5-1/2	13-25	050-4312-000	4.312	4.580	5.044	050-4312-200	20						
6	10.5-12	050-5375-000	5.375	5.595	6.135	050-5687-200	20						
6-5/8	17-34	050-5687-000	5.687	6.004	6.538	050-6312-200	050-5687-205		20				
7	32-38								20				
7	17-35								20				
7-5/8	20-39	050-6312-000	6.312	6.625	7.263	050-6312-200	050-5687-205		20			8,000	300 Deg F
8-5/5	24-49	050-7125-000	7.125	7.511	8.248	050-7125-200	20						
9-5/8	29.3-53.5	050-8125-000	8.125	8.435	9.063	050-8125-200	20						
10-3/4	60.7-81	050-9000-000	9.000	9.250	9.660	050-9000-200	20						
10-3/4	32.75-60.7	050-9437-000	9.437	9.660	10.192	050-9437-200	050-8125-210	20					
13-3/8	77-102	050-1156-000	11.562	11.633	12.464	050-1156-200	20	3,000					
13-3/8	48-72	050-1200-000	12.000	12.175	12.715	050-1200-200	20	20					

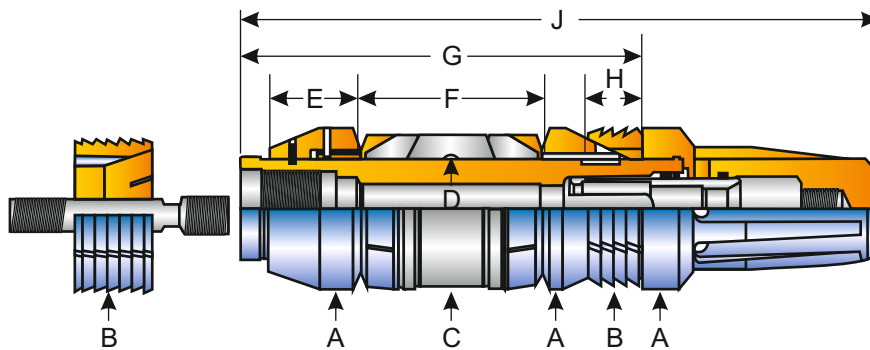

Dimensional Data

A	B	C	D	E	F	G	H	J	Seal Bore
3.593	3.531	3.531	2.500	2.437	5.375	12.437	2.187	20.312	1.345
3.937	3.875	3.875	2.500	2.437	5.375	12.437	2.187	20.312	
4.312	4.187	4.218	2.750	2.875	5.625	12.437	1.625	20.312	
5.375	5.312	5.281	3.687	2.687	6.687	14.032	2.187	22.000	
5.687	5.625	5.593	3.687	2.687	6.687	14.032	2.187	22.000	2.000
6.312	6.250	6.250	4.125	3.062	6.562	14.125	2.187	22.062	
7.125	7.062	7.000	4.625	2.750	6.562	15.093	2.500	22.781	
8.125	8.000	8.000	5.125	3.062	6.562	15.093	2.750	22.781	
9.000	8.875	8.875	5.687	3.500	6.000	19.500	3.250	23.125	
9.437	9.375	9.375	6.750	3.500	8.875	19.500	3.125	23.125	
11.562	11.500	11.500	9.000	4.625	8.875	21.343	3.250	23.875	
12.000	11.875	11.875	9.000	4.625	8.875	12.343	3.250	23.875	