



PARVEEN MODEL 'L' SLIDING SLEEVE

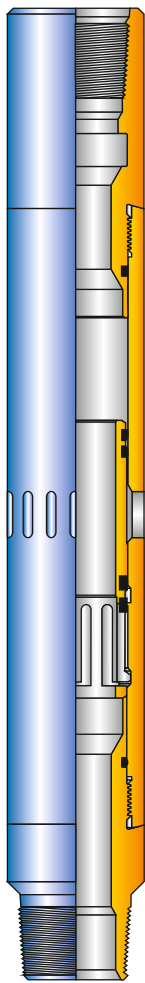

CLOSED

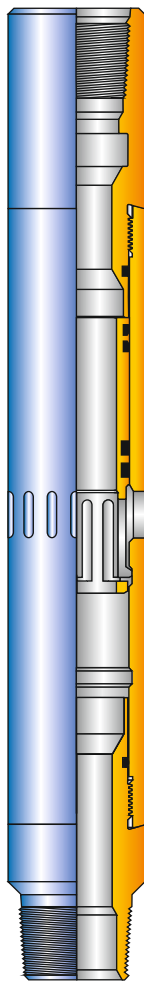

OPEN

The PARVEEN Model 'L' sliding sleeve is a downhole tool used to establish communication, when desired, between the tubing and annulus. Selective and /or top No-Go locking devices are available for use with the sleeve. It has seal bores above and below the ports, and a top No-Go shoulder and locking groove.

The 'L' sliding sleeve locates, seals and retains flow control accessories that have either top No-Go or selective locks.

PARVEEN Model 'L' sliding sleeve is manufactured for standard H₂S and H₂S - CO₂ services.

'L' SLIDING SLEEVE SPECIFICATIONS			
Tubing ID-in.	Sliding Sleeve		
	Seal Bore in.	Size-in.	OD-in.
1.900	1.437	1.43	2.375
	1.500	1.50	
2.1/16	1.562	1.56	2.500
	1.625	1.62	
2.3/8	1.781	1.78	2.910
	1.812	1.81	
	1.875	1.87	
2.7/8	2.250	2.25	3.410
	2.312	2.31	
3.1/2	2.750	2.75	4.500
	2.812	2.81	
4.1/2	3.688	3.68	5.500
	3.812	3.81	
5.1/2	4.313	4.31	Coupling OD
	4.562	4.56	