


## RETRIEVABLE PRODUCTION - PRESSURE OPERATED GAS LIFT VALVES


PARVEEN wireline retrievable production pressure operated GLV's are used for continuous flow gas lift production. A nitrogen charged multiply monel bellow provides the force necessary to maintain valve in a normally closed position. This valve contains the integral reverse flow check valve.

Port sizes available are 3/16", 1/4" & 5/16"

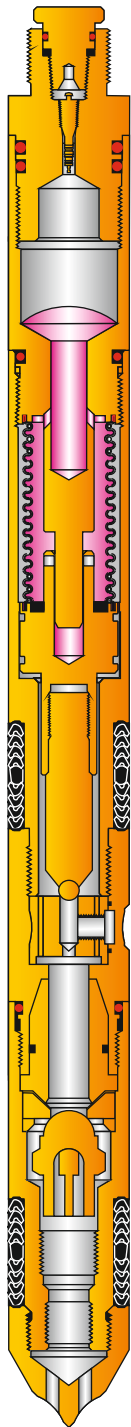

**PR-5  
GAS LIFT  
VALVE**

ENGINEERING DATA FOR RETRIEVABLE PRODUCTION-PRESSURE VALVE .								
Type	Assly Number.	Nominal O.D. in.	Latch	Running Tool		Pulling Tool		Mandrel Series.
				Type	Assly No.	Type	Assly No.	
PR-5	160-40 XX-XXX -01	1.1/2	R, RA, RK.	RTG, TER	16927 11730	PTG, TRP	17048 11390	MM, MMA, MMG.
PBK-2	160-40 XX-XXX -01	1	Integral Bottom	MR-01	10336-01	MP	11361	TMP, KBM, KBMG, KBG.

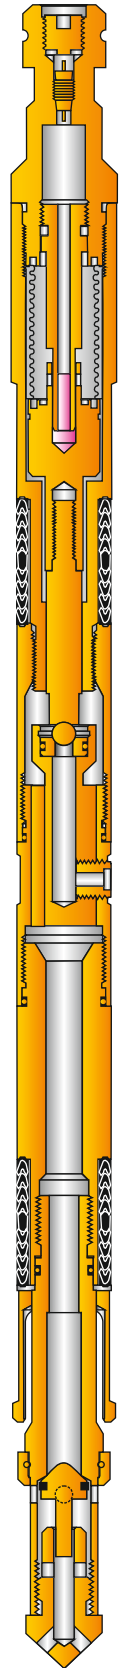

**PBK-2  
GAS LIFT  
VALVE**