


## HEAVY DUTY “GS” PULLING TOOL

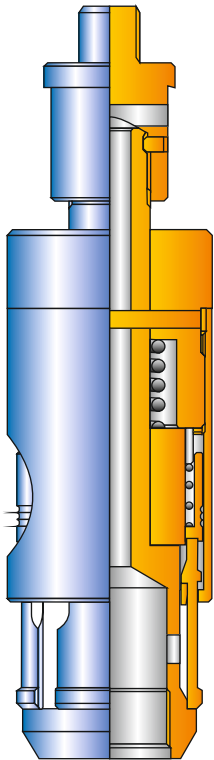


The PARVEEN Heavy Duty ‘GS’ Pulling Tool is a full radial contact pulling tool for heavy jarring and for engaging badly scaled fishing necks. It can also retrieve worn or damaged fishing neck with its 35% greater contact area of the dogs than a standard GS Pulling Tool.

HEAVY DUTY ‘GS’ PULLING TOOL							
Nominal Size (in)	Prong Conn. Box	Fishing Neck I.D. Guide (in)	Max O.D. (in)	F/N O.D. (in)	Top Connection	Reach (in)	Part No.
2	1/2 - 13	1.380	1.810	1.375	15/16 - 10 UN	1.62	28200-1H
2-1/2	5/8 - 11	1.810	2.160	1.750	15/16 - 10 UN	1.62	28250-0H
2-1/2	5/8 - 11	1.810	2.160	1.750	15/16 - 10 UN	1.62	28250-1H
3	5/8 - 11	2.310	2.720	2.313	1-1/16 - 10 UN	1.62	28300-0H
3-1/2	1-3/8 - 12	2.620	3.110	2.313	1-1/16 - 10 UN	1.62	28350-0H
4	2-1/8 - 12	3.120	3.620	2.313	1-1/16 - 10 UN	1.62	28400-0H
5	2-1/2 - 10	4.000	4.500	3.125	1-1/16 - 10 UN	1.82	28500-0H
6	2-3/4 - 10	4.750	5.560	3.125	1-1/16 - 10 UN	1.86	28600-0H
7	3-5/8 - 10	5.250	5.880	3.125	1-1/16 - 10 UN	1.86	28700-0H

**HEAVY DUTY GS PULLING TOOL**

## HEAVY DUTY RELEASABLE PULLING TOOL

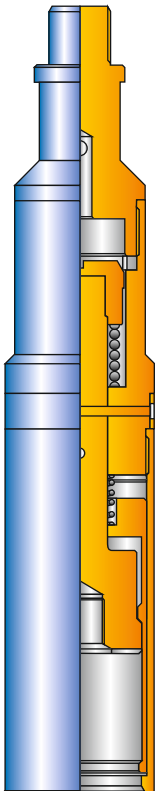

The PARVEEN Heavy Duty Releasable Pulling Tool is a collet type pulling tool used to latch and retrieve wireline tools with badly damaged external fishing necks.

The Heavy Duty Releasable Pulling Tool is extremely robust in construction and allows a full 360-degree engagement with the fishing neck to be latched.

The fishing socket can be released by jarring downwards provided a solid footing is available for the core to be driven against.

HEAVY DUTY RELEASABLE PULLING TOOL							
Nominal Size (in)	Max. O.D. (in)	To Catch F/N (in)	Reach (in)	Length (in)	F/N O.D. (in)	Top Connection	Part No.
1-1/4	1.285	0.875	2.00	14.60	1.187	15/16 - 10 UN	263-028
1-5/8	1.625	1.000	1.85	15.60	1.1875	15/16 - 10 UN	263-012
1-5/8	1.625	1.187	1.85	15.60	1.1875	15/16 - 10 UN	263-008
2	1.875	1.275	1.84	15.60	1.375	15/16 - 10 UN	263-003
2-1/2	2.300	1.750	1.84	15.60	1.750	1-1/16 - 10 UN	263-022
3	3.250	2.313	1.69	18.60	2.313	1-1/16 - 10 UN	263-014
4	3.800	3.125	2.73	18.60	2.313	1-9/16 - 10 UN	263-007

**HEAVY DUTY RELEASABLE PULLING TOOL**